

QUICKTRONIC® T8 Instant Start Universal Voltage



Normal Ballast Factor

High Efficiency Series

QHE T8 ISN

Lamp / Ballast Guide

32W T8 - OCTRON®
QHE ISN SC Models

- 1-lamp QHE1x32T8/UNV
- 2-lamp QHE2x32T8/UNV
- 3-lamp QHE3x32T8/UNV
- 4-lamp QHE4x32T8/UNV

Also operates:

FB032, FB031, FO25, FB024, FO17, FB016, FO30/SS (30W), FB030/SS (30W), FB029/SS (29W), FO28/SS (28W) & FO25/SS (25W)

FO40T8 operation:

1 lamp on 2L ballast; 2 lamps on 3L ballast; 3 lamps on 4L ballast

Key System Features

- High Efficiency Systems over 90% efficient
- NEMA Premium Ballast (NPB) Program compliant
- Over 100 LPW (lumens/watt) with OCTRON SUPERSAVER® lamps
- Lowest power T8 I.S. Systems
- Universal voltage (120-277V)
- Small Can enclosure size
- 30-50% Energy savings
- Min. Starting Temp:
 - -20°F (-29°C) for T8 lamps
 - 60°F (16°C) for Energy Saving T8 lamps
 - 0°F (-18°C) for FO40T8 lamps
- <10% THD
- Virtually eliminates lamp flicker

Application Information

SYLVANIA QUICKTRONIC High Efficiency is ideally suited for:

- Any applications where the lowest power T8 systems are needed for maximum energy savings
- Energy Retrofits
- Commercial & Retail
- Hospitality & Institutional
- New Construction

SYLVANIA QUICKTRONIC High Efficiency, (QHE) energy-saving electronic T8 ballasts offer several advantages:

1. Same Light, Less Power!
 - Up to 6% in energy savings compared to standard T8 low power electronic ballasts without compromising light output
 - 30-44% energy savings when compared to F40T12 magnetically ballasted systems (see table below)
2. Parallel Circuitry: keeps remaining lamps lit if one or more go out.
3. Small Can Enclosure for:
 - low profile fixture design
 - transportation, inventory and ergonomic benefits
4. NEMA Premium Ballast (NPB) program compliant. The NPB program promotes the use of high efficiency T8 electronic ballasts by meeting or exceeding the Ballast Efficiency Factors, (BEF) established by the CEE, (Consortium for

System Information

SYLVANIA QUICKTRONIC High Efficiency (QHE) System advantages:

- Operate from 120V through 277V
 - Eliminates "wrong voltage" errors
 - Reduces inventory by 50%
- Utilizes Instant Start operation for
 - Highest System Efficacy
 - Low temperature starting capability
- Very low harmonic distortion (<10%)THD
- Operate at >42kHz to reduce potential interference with infrared control systems

A complete OSRAM SYLVANIA System Performance Guide showing performance characteristics for all combinations of lamps and ballasts is available upon request.



Energy Efficiency). For additional information on this program go to:

www.cee1.org or www.nema.org


5. New Banded Packaging

- Distributor-friendly for easy stocking and individual ballast sales
- Reduced waste

- Easy removable bands
- No tangled wires

SYLVANIA QUICKTRONIC High Efficiency (QHE) is also covered by our QUICK 60+® warranty, the first and most comprehensive lamp & ballast system warranty in the industry.

System Type (2-lamp)	Input Power (W)	Initial System Lumens	System Efficacy LPW	Mean System Lumens	Relative Mean Light Output	Energy Savings
F40T12 - E.S. Magnetic Ballast	86	5795	67	4930	Baseline	Baseline
F34T12 - E.S. Magnetic Ballast	72	4660	65	3960	80%	16%
F032/XP - QHE2x32T8/UNV ISN-SC	55	5280	96	4965	101%	36%
F028/SS - QHE2x32T8/UNV ISN-SC	48	4800	100	4510	91%	44%

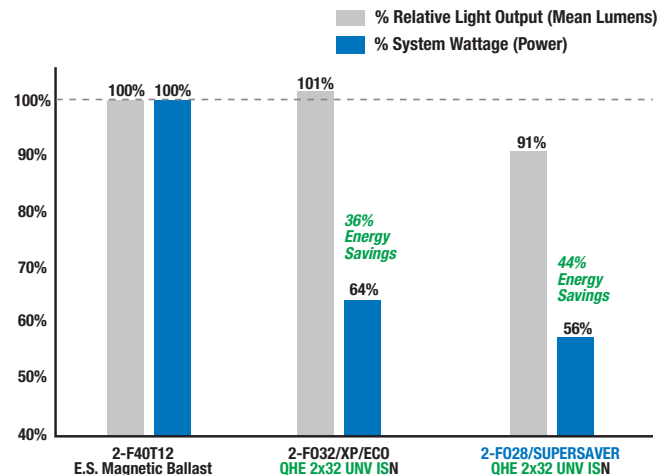

Normal Ballast Factor

T8 Instant Start

High Efficiency

Performance Guide

Data based upon SYLVANIA OCTRON® lamps shown. QUICKTRONIC® QHE Instant Start ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications. QHE Instant Start ballasts will operate F17, F25 and F32 (and the SUPER-SAVER® & U-Bend equivalent) T8 lamps. Complete performance data is available in the QUICKSYSTEMS section of the SYLVANIA Electronic Ballast Catalog.

Specifications

Data based on F32T8

Starting Method: Instant Start
Ballast Factor: 0.88
Circuit Type: Parallel
Lamp Frequency: >40kHz
Lamp CCF: Less than 1.7
Starting Temp:²
 -20°F (-29°C) for OCTRON T8 lamps;
 60°F (16°C) for SUPERSAVER® T8 lamps
 0°F (-18°C) for FO40T8
Input Frequency: 50/60 Hz
Low THD: <10%
Power Factor: >98%
Voltage Range: ±10% of 120-277V rated line (108-305V)

UL Listed Class P, Type 1 Outdoor
 CSA Certified
 70°C Max Case Temperature
 FCC 47CFR Part 18 Non-Consumer
 Class A Sound Rating
 NEMA Ballast Program compliant
 ANSI C62.41 Cat. A Transient Protection
 GFCI compatible
 Emergency ballast compatible
 Remote Mounting (Max. wire length from ballast case to lampholder):

- 20 ft: full wattage T8s
- 10 ft: energy saving T8s
- 4 ft: 25W energy saving T8s

² Operation below 50°F (10°C) may affect light output or lamp operation – see "Low Temp. Starting" definition.

System Life / Warranty

QUICKTRONIC products are covered by our QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to our QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
 1-800-LIGHTBULB
 (1-800-544-4828)
www.sylvania.com



QHE T8 ISN

SPECIFICATION DATA


Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency Universal Voltage (120-277V)




Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Mean Lumens	Input Power (W)	System Efficacy (lm/W)	BEF ¹
49968 49851 49852	QHE 1X32T8/UNV ISN-SC <i>Banded Pack</i> <i>10-Pack</i> <i>Pallet Pack</i>	0.25/0.11	F032/700	2800	1	0.88	2465	2220	28	88	3.14
		0.25/0.11	F032/XP	3000	1	0.88	2640	2480	28	94	3.14
		0.22/0.09	F030/SS	2850	1	0.88	2510	2360	26	97	3.38
		0.21/0.09	F028/SS	2725	1	0.88	2400	2255	25	96	3.52
		0.19/0.09	F025/SS	2475	1	0.88	2175	2045	22	99	4.00
49969 49853 49854	QHE 2X32T8/UNV ISN-SC <i>Banded Pack</i> <i>10-Pack</i> <i>Pallet Pack</i>	0.47/0.20	F032/700	2800	2	0.88	4930	4435	55	90	1.60
		0.47/0.20	F032/XP	3000	2	0.88	5280	4965	55	96	1.60
		0.44/0.19	F030/SS	2850	2	0.88	5015	4715	52	96	1.69
		0.40/0.18	F028/SS	2725	2	0.88	4800	4510	48	100	1.83
		0.36/0.16	F025/SS	2475	2	0.88	4355	4095	43	101	2.05
49970 49855 49856	QHE 3X32T8/UNV ISN-SC <i>Banded Pack</i> <i>10-Pack</i> <i>Pallet Pack</i>	0.69/0.30	F032/700	2800	3	0.88	7390	6650	83/82	89/90	1.07
		0.69/0.30	F032/XP	3000	3	0.88	7920	7445	83/82	95/97	1.07
		0.66/0.28	F030/SS	2850	3	0.88	7525	7075	78/77	96/98	1.14
		0.61/0.26	F028/SS	2725	3	0.88	7195	6760	72	100	1.22
		0.55/0.23	F025/SS	2475	3	0.88	6530	6140	65/64	101/102	1.38
49971 49857 49858	QHE 4X32T8/UNV ISN-SC <i>Banded Pack</i> <i>10-Pack</i> <i>Pallet Pack</i>	0.91/0.39	F032/700	2800	4	0.88	9855	8870	108/107	91/92	0.82
		0.91/0.39	F032/XP	3000	4	0.88	10560	9925	108/107	98/99	0.82
		0.86/0.37	F030/SS	2850	4	0.88	10030	9430	102/101	98/99	0.87
		0.80/0.35	F028/SS	2725	4	0.88	9590	9015	95	101	0.93
		0.71/0.30	F025/SS	2475	4	0.88	8710	8190	85	102	1.04

*Banded Pack, (add "B" to Description). Banded Pack and 10-Pack contain 10 pieces each. Pallet Pack contains 840 pieces, (add "PAL" to Description).
 1: Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).*

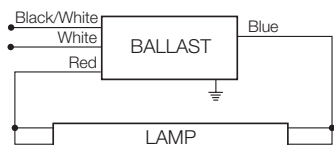


QUICKTRONIC 1x32

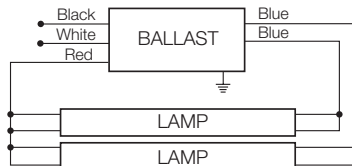


Note: For one lamp application, cap any blue lead. Insulate to 600 volts.

QUICKTRONIC 2x32

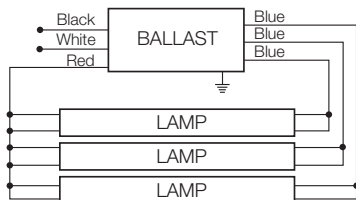

Note: For two lamp application, cap any blue lead. For one lamp application, cap any two blue leads. Insulate to 600 volts.

QUICKTRONIC 3x32

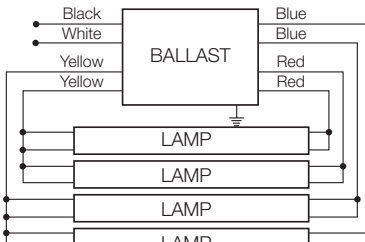

Note: For three lamp application, cap any unused blue lead. For two lamp application, cap two blue leads individually. For one lamp application, cap two blue leads, one red and one yellow lead individually. Insulate to 600 volts.

QUICKTRONIC 4x32

Dimensions:


Overall: 9.5" L x 1.68" W x 1.18" H
 Mounting: 8.90"

Product Weight:

1.6 lbs each (approx)

Wiring:

Leads only
 (no connectors provided)

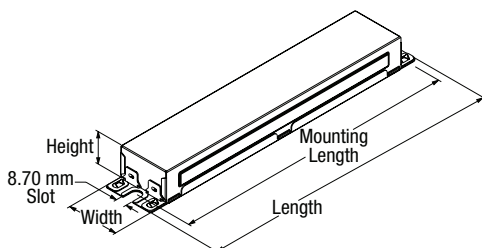

Item Number	49970 QHE 3 x 32T8 / UNV ISN - SC	Case Size
QUICKTRONIC High Efficiency		Starting/Ballast Factor
Number of Lamps		Line Voltage (120-277V)
		Primary Lamp Wattage

Specifications subject to change without notice.